

650V 75A Insulated Gate Bipolar Transistor
AKB65A075WHH

Description:

Gen 3 IGBT with soft, fast recovery full current rated anti-parallel Emitter Controlled diode, providing ultra-low conduction loss . They are designed for applications such as UPS, inverters, etc.

Features:



- Easy paralleling capability due to positive temperature coefficient in V_{CESAT}
- Low EMI
- Low Gate Charge
- Very soft, fast recovery full current anti-parallel diode
- Maximum junction temperature $T_{VJmax}=175^{\circ}C$
- RoHS compliant ^(Note 1)
- Halogen-free ^(Note 1)

Applications:

- Industrial UPS
- Charger
- Energy Storage
- Three-Phase Solar String Inverter

Key Performance Parameters:

Parameter	Value	Unit
V_{CE}	650	V
$V_{CESAT}, T_{VJ} = 25^{\circ}C$	1.6	V
I_C	75	A



Ordering Information:

Ordering Code	Package Type	Marking Code	Form	Packing
AKB65A075WHH	TO247-3L	B65A075WHH	Tube	300PCS

Notes:

1. Contact ALKAIDSEMI sales for detail information



Maximum Ratings (T_{VJ} = 25°C unless otherwise noted)

Symbol	Parameter	Value	Units
V _{CE}	Collector-Emitter Voltage	650	V
I _C	Collector Current - Continuous (T _C = 25°C) ^(Note 1)	90	A
	Collector Current - Continuous (T _C = 100°C)	75	A
I _{CM}	Collector Current - Pulsed ^(Note 2)	300	A
I _F	Diode Forward Current, limited by T _{VJmax} (T _C = 25°C)	90	A
	Diode Forward Current, limited by T _{VJmax} (T _C = 100°C)	75	A
I _{FM}	Diode Pulsed Current, - Pulsed ^(Note 2)	300	A
V _{GE}	Gate-Emitter Voltage	±20	V
	Transient Gate-Emitter Voltage (tp ≤ 10µs, D < 0.010)	±30	
P _D	Power Dissipation (T _C = 25°C)	258	W
	Power Dissipation (T _C = 100°C)	129	W
T _J	Operating Junction Temperature Range	-40 to +175	°C
T _{STG}	Storage Temperature Range	-55 to +150	°C

Thermal Characteristics

Symbol	Parameter	Value	Units
R _{θJC}	IGBT Thermal Resistance, Junction-to-Case, Steady-State	0.45	°C/W
R _{θJC}	Diode Thermal Resistance, Junction-to-Case, Steady-State	0.54	°C/W
R _{θJA}	Thermal Resistance, Junction-to-Ambient Steady State	40	°C/W

Notes:

- 1. The max Collector current rating is package limited
- 2. Repetitive Rating: Pulse width limited by maximum junction temperature

Electrical Characteristics ($T_{VJ} = 25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Static Characteristics						
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage	$V_{GE} = 0\text{ V}, I_C = 0.2\text{ mA}$	650			V
V_{CESAT}	Collector-Emitter Saturation Voltage	$V_{GE} = 15\text{ V}, I_C = 75\text{ A}$		1.60	2.10	V
		$V_{GE} = 15\text{ V}, I_C = 75\text{ A}, T_{VJ} = 125^{\circ}\text{C}$		1.86		
		$V_{GE} = 15\text{ V}, I_C = 75\text{ A}, T_{VJ} = 175^{\circ}\text{C}$		2.00		
V_F	Diode Forward Voltage	$V_{GE} = 0\text{ V}, I_F = 75\text{ A}$		1.50	1.90	V
		$V_{GE} = 0\text{ V}, I_F = 75\text{ A}, T_{VJ} = 125^{\circ}\text{C}$		1.63		
		$V_{GE} = 0\text{ V}, I_F = 75\text{ A}, T_{VJ} = 175^{\circ}\text{C}$		1.60		
$V_{GE(TH)}$	Gate-Emitter Threshold Voltage	$V_{CE} = V_{GE}, I_C = 0.75\text{ mA}$	3.2	4.0	4.8	V
I_{CES}	Zero Gate Voltage Collector Current	$V_{CE} = 650\text{ V}, V_{GE} = 0\text{ V}$			75	μA
		$V_{CE} = 650\text{ V}, V_{GE} = 0\text{ V}, T_{VJ} = 175^{\circ}\text{C}$		2000		
I_{GES}	Gate-Emitter Leakage Current	$V_{GE} = \pm 20\text{ V}, V_{CE} = 0\text{ V}$			100	nA
g_{fs}	Transconductance	$V_{GE} = 20\text{ V}, I_C = 75\text{ A}$		86		S
Dynamic Characteristics						
C_{ies}	Input Capacitance	$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V},$ $F = 1\text{ MHz}$		2810		pF
C_{oes}	Output Capacitance			215		pF
C_{res}	Reverse Transfer Capacitance			23		pF
Q_G	Total Gate Charge	$V_{CC} = 520\text{ V}, I_C = 75\text{ A},$ $V_{GE} = 15\text{ V}$		104		nC
Q_{GE}	Gate-Emitter Charge			15		nC
Q_{GC}	Gate-Collector Charge			30		nC
L_E	Internal Emitter Inductance			13		nH
Switching Characteristics, Inductive Load ($T_{VJ} = 25^{\circ}\text{C}$)						
$t_{d(on)}$	Turn On Delay Time	$V_{CC} = 400\text{ V}$ $I_C = 75\text{ A}$ $V_{GE} = 15\text{ V}$ $R_{G(on)} = 8\ \Omega$ $R_{G(off)} = 8\ \Omega$		19		ns
t_r	Rise Time			31		ns
$t_{d(off)}$	Turn Off Delay Time			131		ns
t_f	Fall Time			32		ns
E_{on}	Turn On Energy			2.04		mJ
E_{off}	Turn Off Energy			0.92		mJ
E_{total}	Total Switching Energy			2.96		mJ

$t_{d(on)}$	Turn On Delay Time	$V_{CC} = 400\text{ V}$ $I_C = 37.5\text{ A}$ $V_{GE} = 15\text{ V}$ $R_{G(on)} = 8\ \Omega$ $R_{G(off)} = 8\ \Omega$		24		ns
t_r	Rise Time			15		ns
$t_{d(off)}$	Turn Off Delay Time			172		ns
t_f	Fall Time			14		ns
E_{on}	Turn On Energy			0.90		mJ
E_{off}	Turn Off Energy			0.42		mJ
E_{total}	Total Switching Energy			1.32		mJ

Diode Characteristics ($T_{VJ} = 25^\circ\text{C}$)

t_{rr}	Reverse Recovery Time	$V_R = 400\text{ V}, I_F = 75\text{ A},$ $di/dt = 1000\text{ A}/\mu\text{s}$		96		ns
Q_{RR}	Reverse Recovery Charge			1.87		μC
I_{rrm}	Peak Reverse Recovery Current			26		A
di_{rr}/dt	Diode Peak Rate of Fall of Reverse Recovery Current			-764		A/ μs

t_{rr}	Reverse Recovery Time	$V_R = 400\text{ V}, I_F = 37.5\text{ A},$ $di/dt = 1000\text{ A}/\mu\text{s}$		65		ns
Q_{RR}	Reverse Recovery Charge			1.26		μC
I_{rrm}	Peak Reverse Recovery Current			27		A
di_{rr}/dt	Diode Peak Rate of Fall of Reverse Recovery Current			-694		A/ μs

Switching Characteristics, Inductive Load ($T_{VJ} = 150^\circ\text{C}$)

$t_{d(on)}$	Turn On Delay Time	$V_{CC} = 400\text{ V}$ $I_C = 75\text{ A}$ $V_{GE} = 15\text{ V}$ $R_{G(on)} = 8\ \Omega$ $R_{G(off)} = 8\ \Omega$		80		ns
t_r	Rise Time			32		ns
$t_{d(off)}$	Turn Off Delay Time			242		ns
t_f	Fall Time			20		ns
E_{on}	Turn On Energy			2.64		mJ
E_{off}	Turn Off Energy			1.00		mJ
E_{total}	Total Switching Energy			3.64		mJ









$t_{d(on)}$	Turn On Delay Time	$V_{CC} = 400\text{ V}$ $I_C = 37.5\text{ A}$ $V_{GE} = 15\text{ V}$ $R_{G(on)} = 8\ \Omega$ $R_{G(off)} = 8\ \Omega$		77		ns
t_r	Rise Time			11		ns
$t_{d(off)}$	Turn Off Delay Time			253		ns
t_f	Fall Time			18		ns
E_{on}	Turn On Energy			1.52		mJ
E_{off}	Turn Off Energy			0.50		mJ
E_{total}	Total Switching Energy			2.02		mJ

Diode Characteristics ($T_{VJ} = 150^{\circ}\text{C}$)

t_{rr}	Reverse Recovery Time	$V_R = 400\text{ V}, I_F = 75\text{ A},$ $di/dt = 1000\text{ A}/\mu\text{s}$		152		ns
Q_{RR}	Reverse Recovery Charge			2.6		μC
I_{rrm}	Peak Reverse Recovery Current			28		A
d_{irr}/dt	Diode Peak Rate of Fall of Reverse Recovery Current			-500		$\text{A}/\mu\text{s}$

t_{rr}	Reverse Recovery Time	$V_R = 400\text{ V}, I_F = 37.5\text{ A},$ $di/dt = 1000\text{ A}/\mu\text{s}$		128		ns
Q_{RR}	Reverse Recovery Charge			2.4		μC
I_{rrm}	Peak Reverse Recovery Current			32		A
d_{irr}/dt	Diode Peak Rate of Fall of Reverse Recovery Current			-327		$\text{A}/\mu\text{s}$

Electrical Characteristics Diagrams

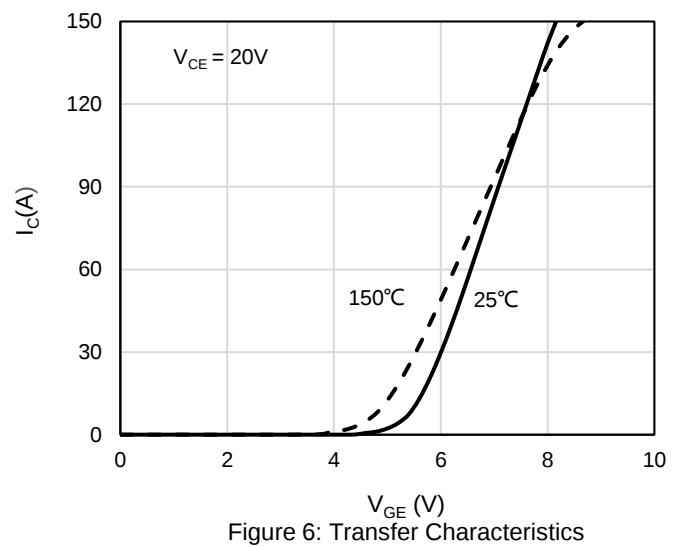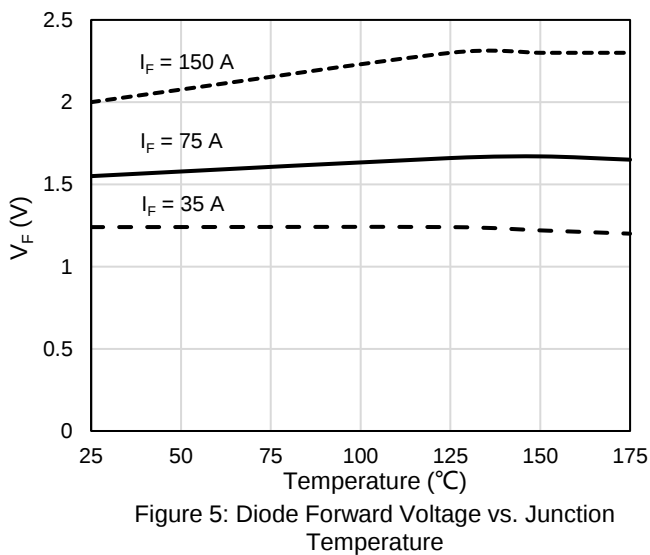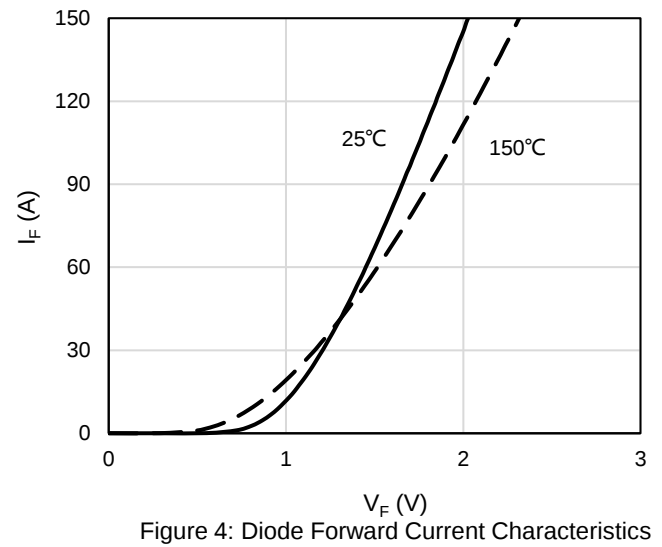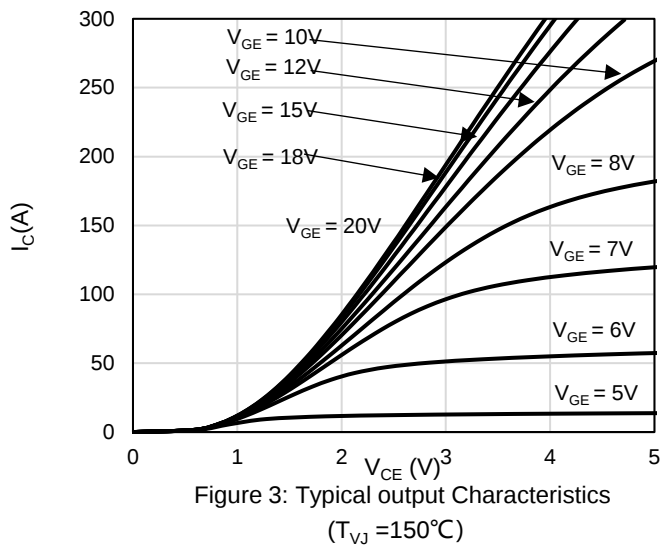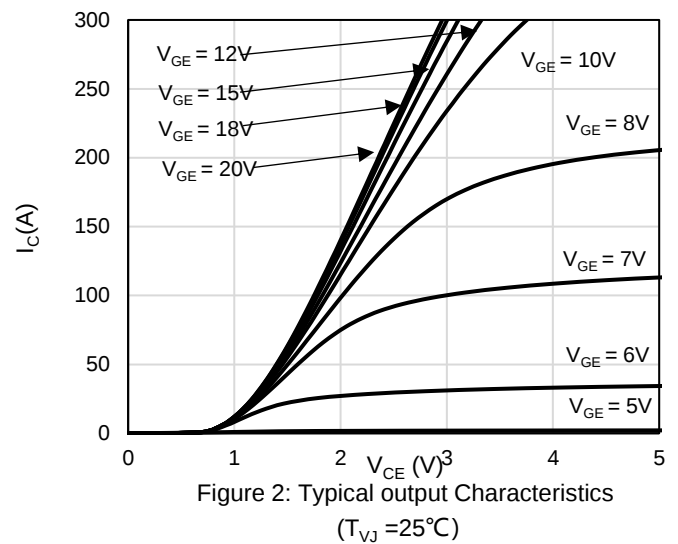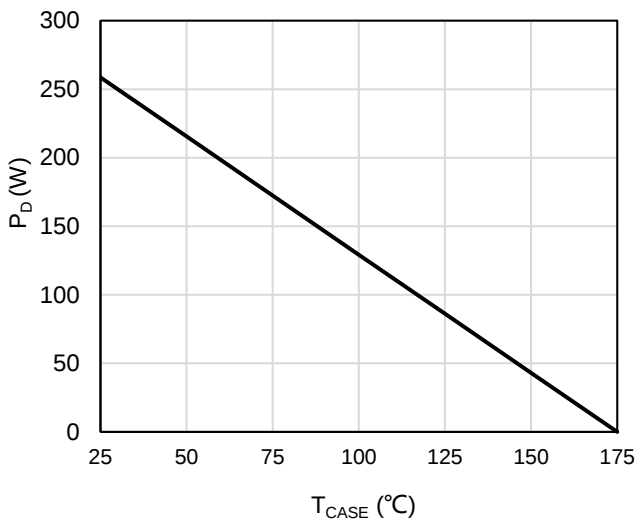

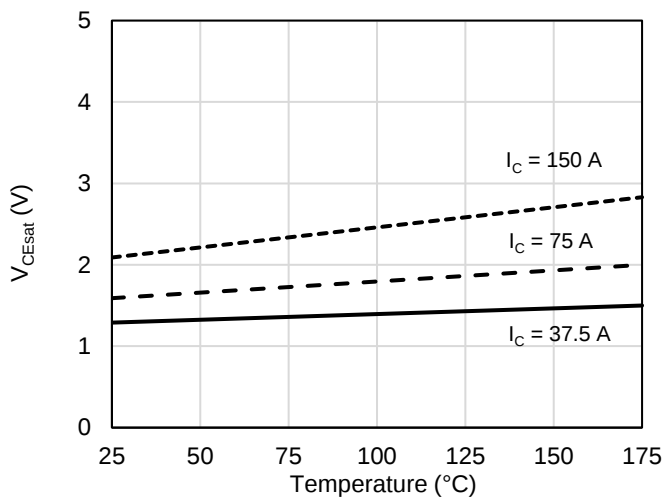


Figure 7: Collect-emitter saturation voltage vs. Junction Temperature

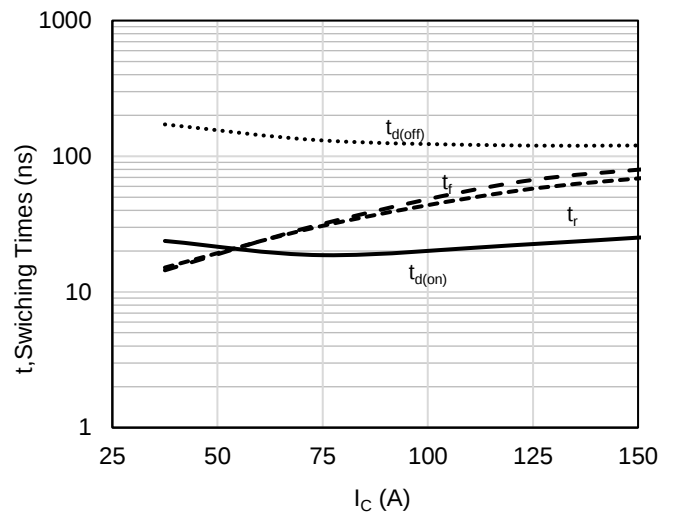


Figure 8: Switching Times vs. Collector Current

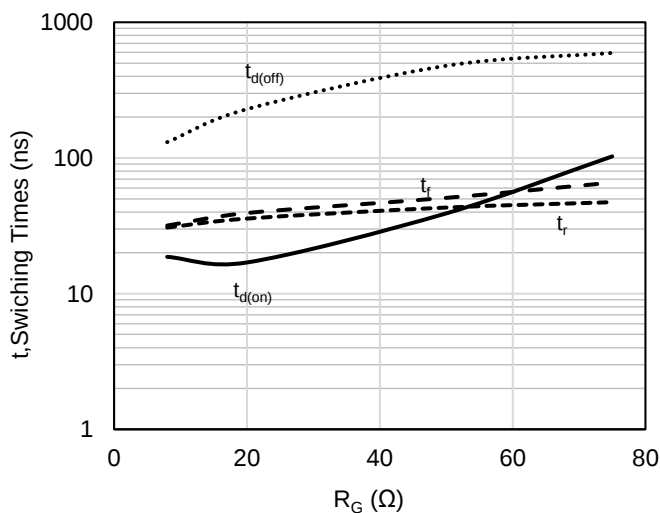


Figure 9: Switching Times vs. Gate Resistor

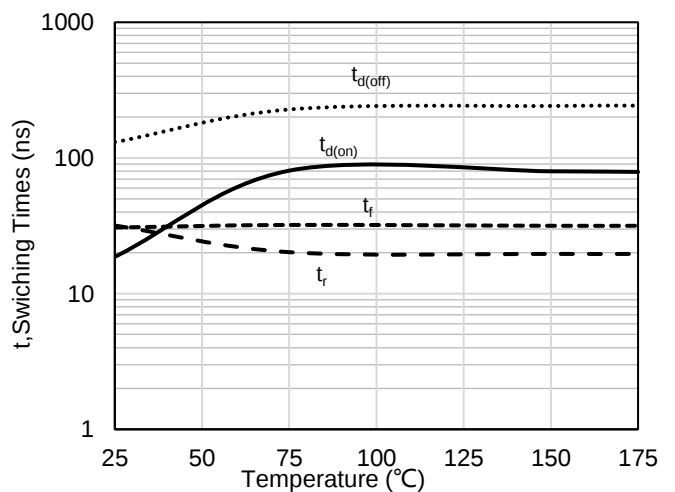


Figure 10: Switching Times vs. Junction Temperature

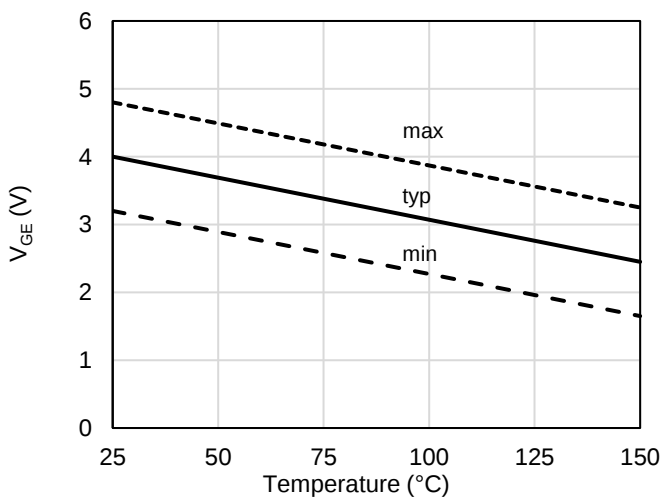


Figure 11: Threshold voltage vs. Junction Temperature

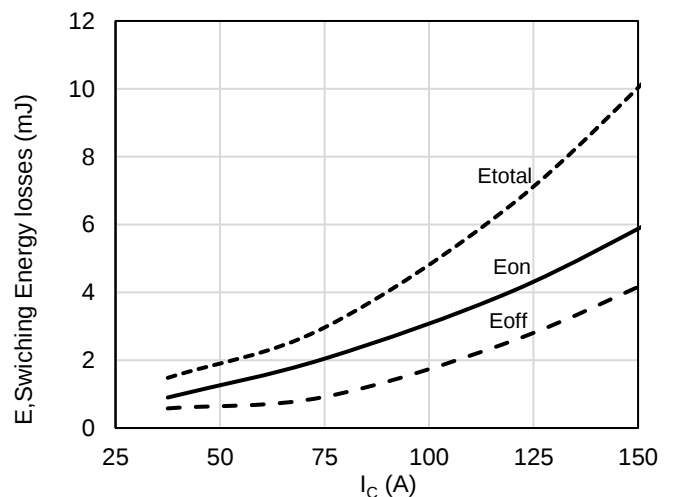


Figure 12: Switching Energy losses vs. Collector Current

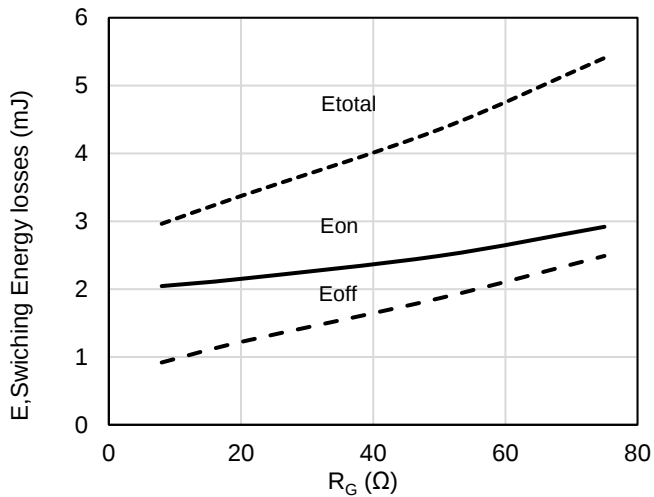


Figure 13: Switching Energy losses vs. Gate Voltage

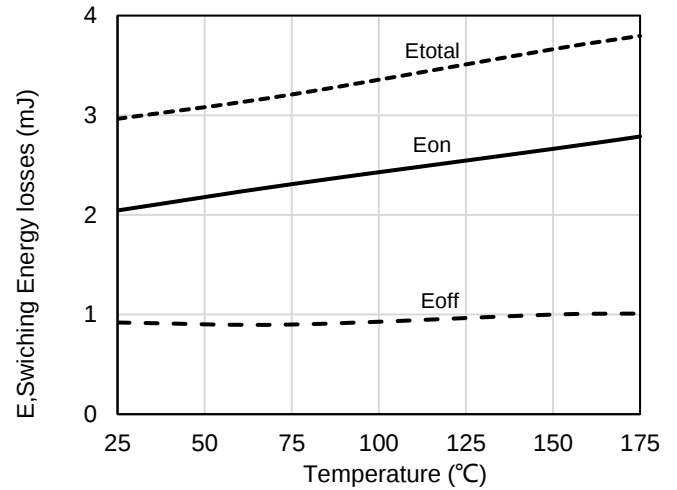


Figure 14: Switching Energy losses vs. Junction Temperature

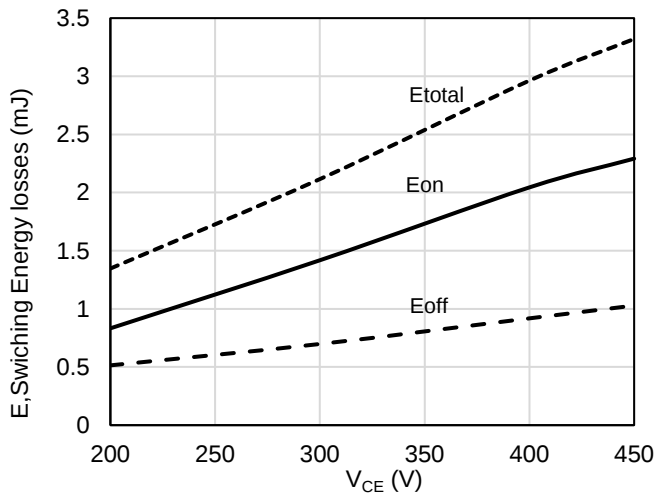


Figure 15: Switching Energy losses vs. Collector Emitter Voltage

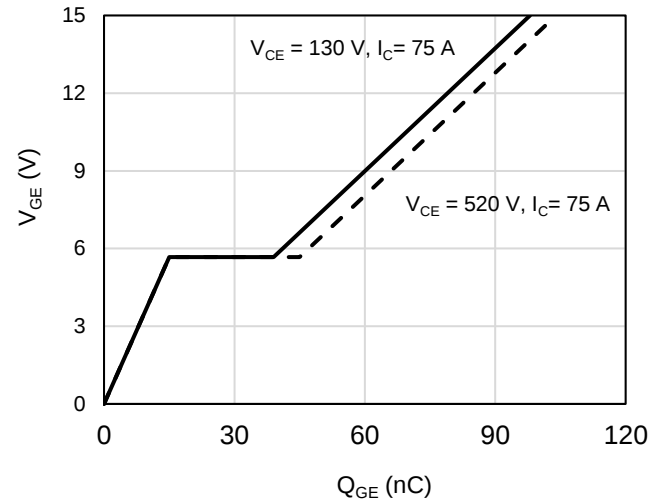


Figure 16: Gate-Charge Characteristics

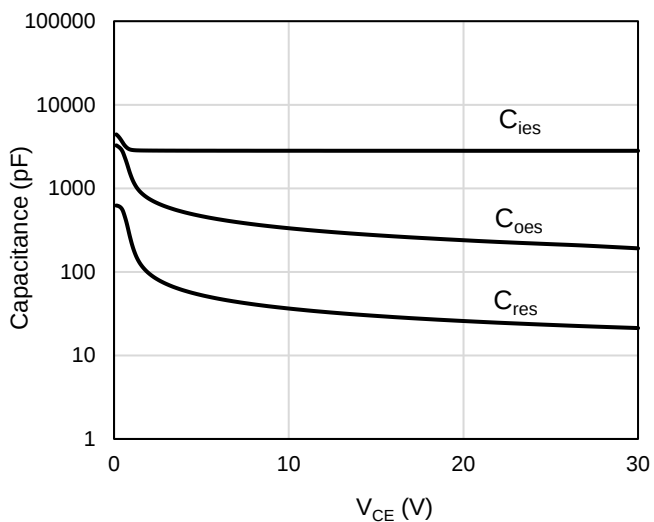


Figure 17: Capacitance Characteristics








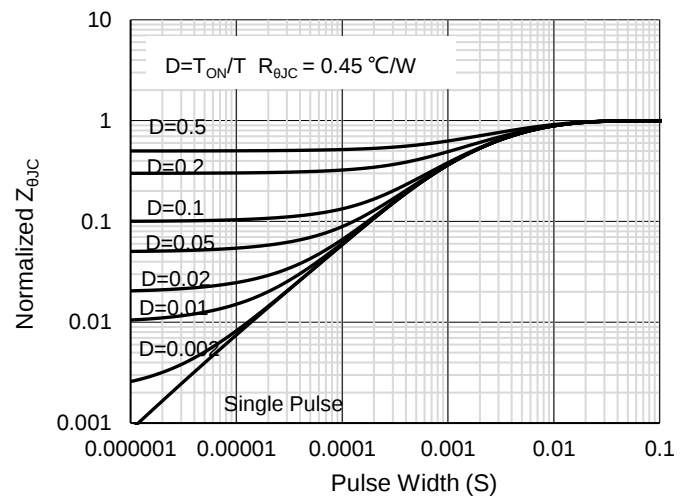


Figure 18: Normalized Maximum IGBT Transient Thermal Impedance

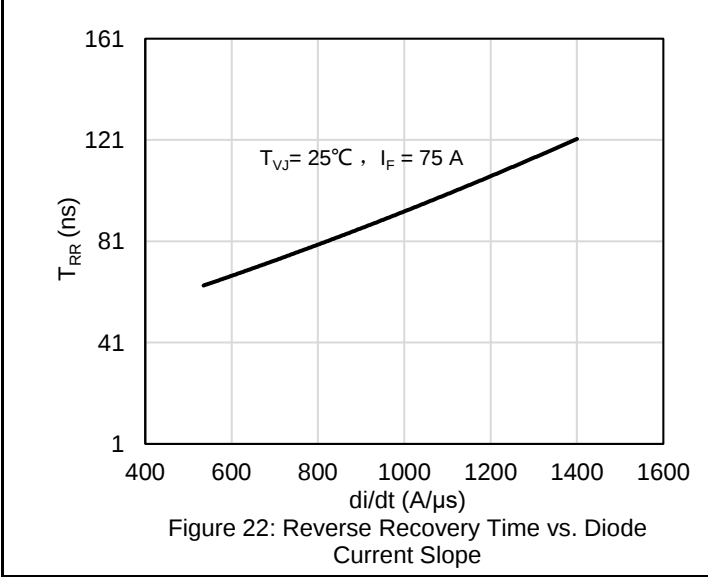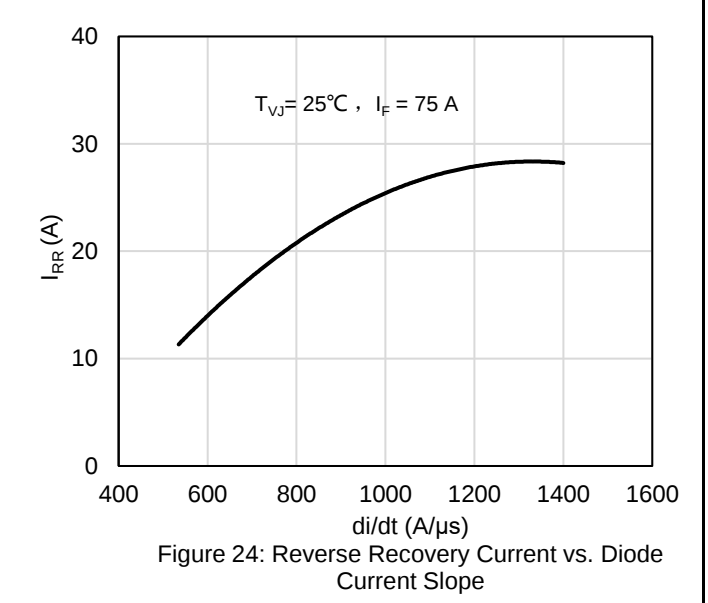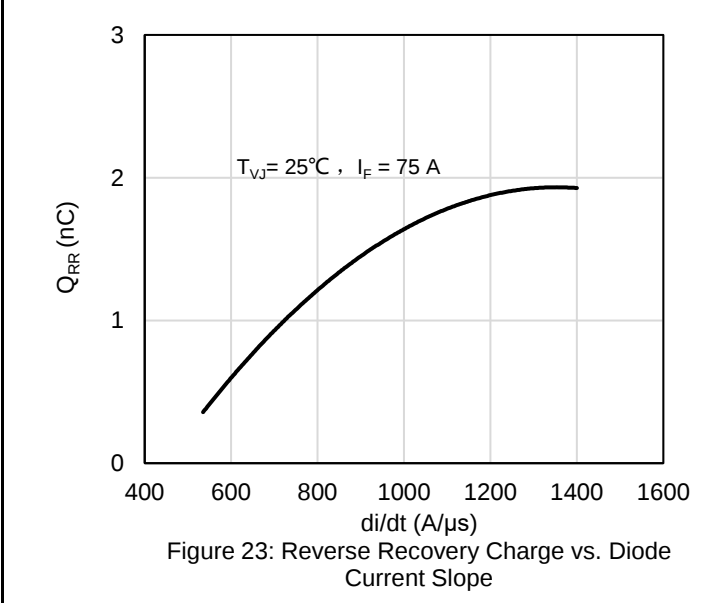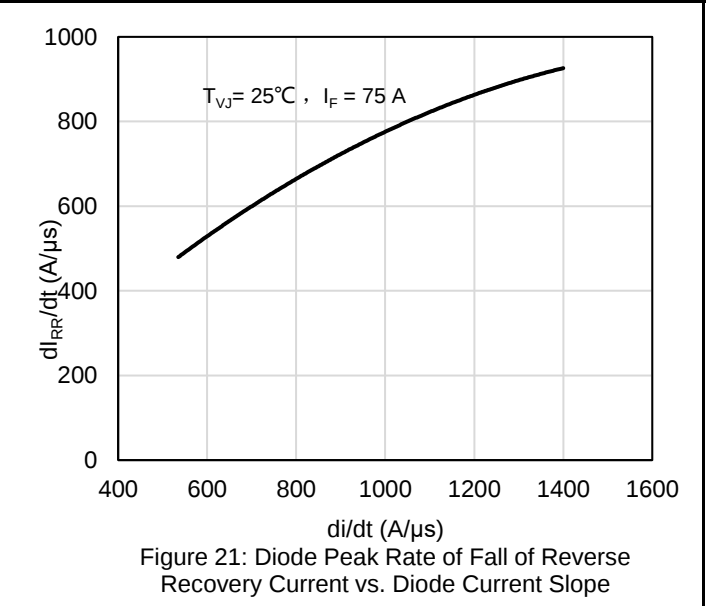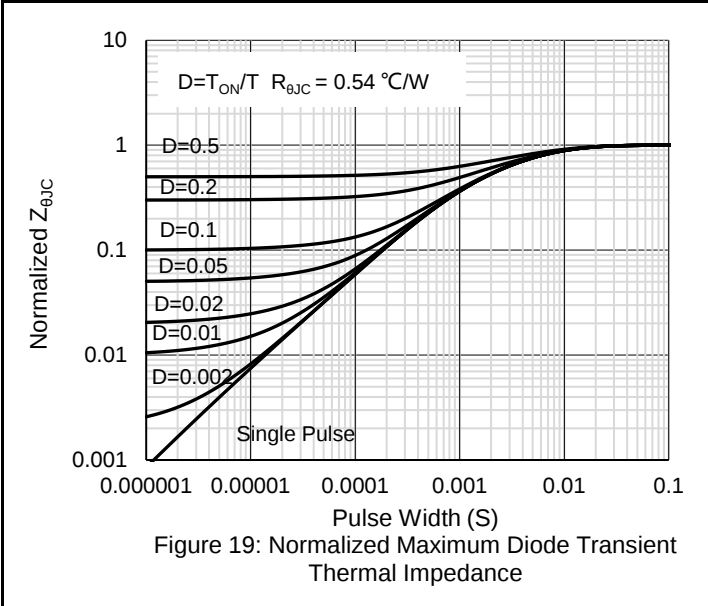
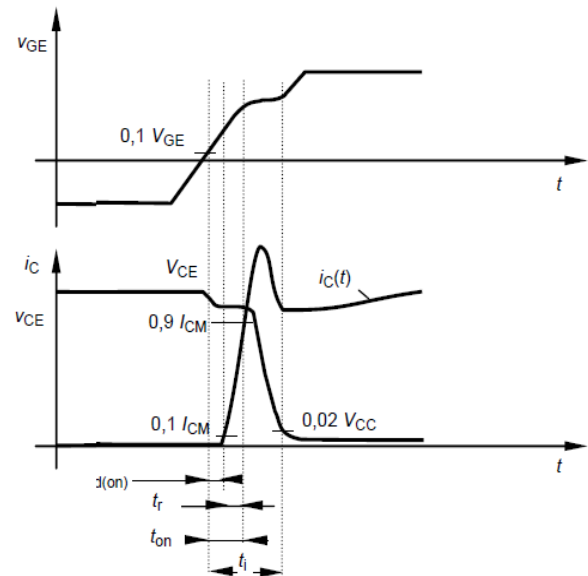


Test Circuit and Waveform


Switching Test Circuit & Waveforms

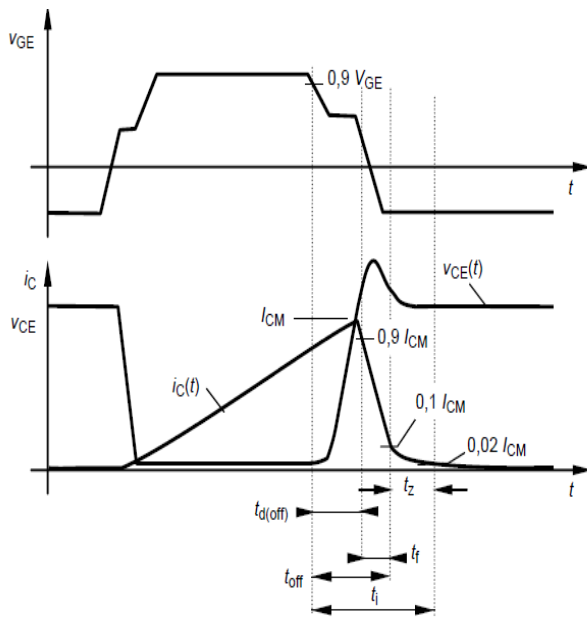

Diode Recovery Test Circuit & Waveforms

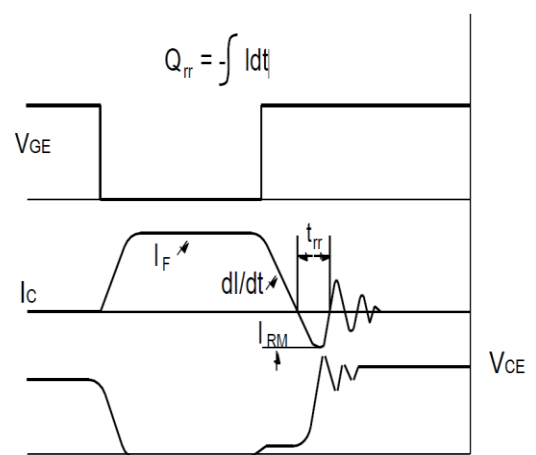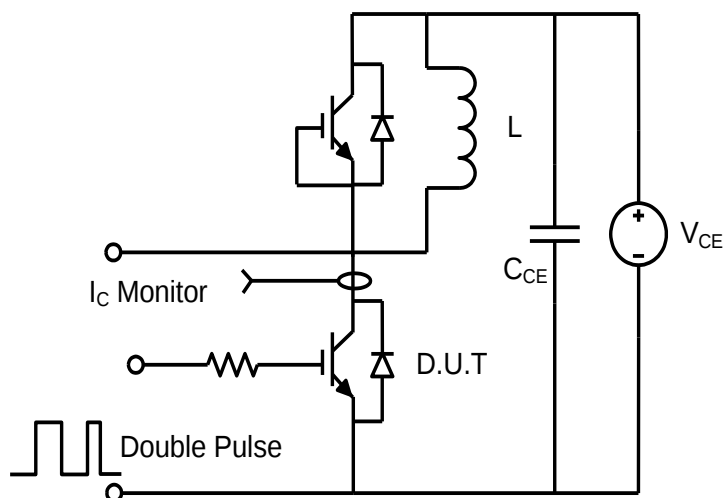

Package Outlines

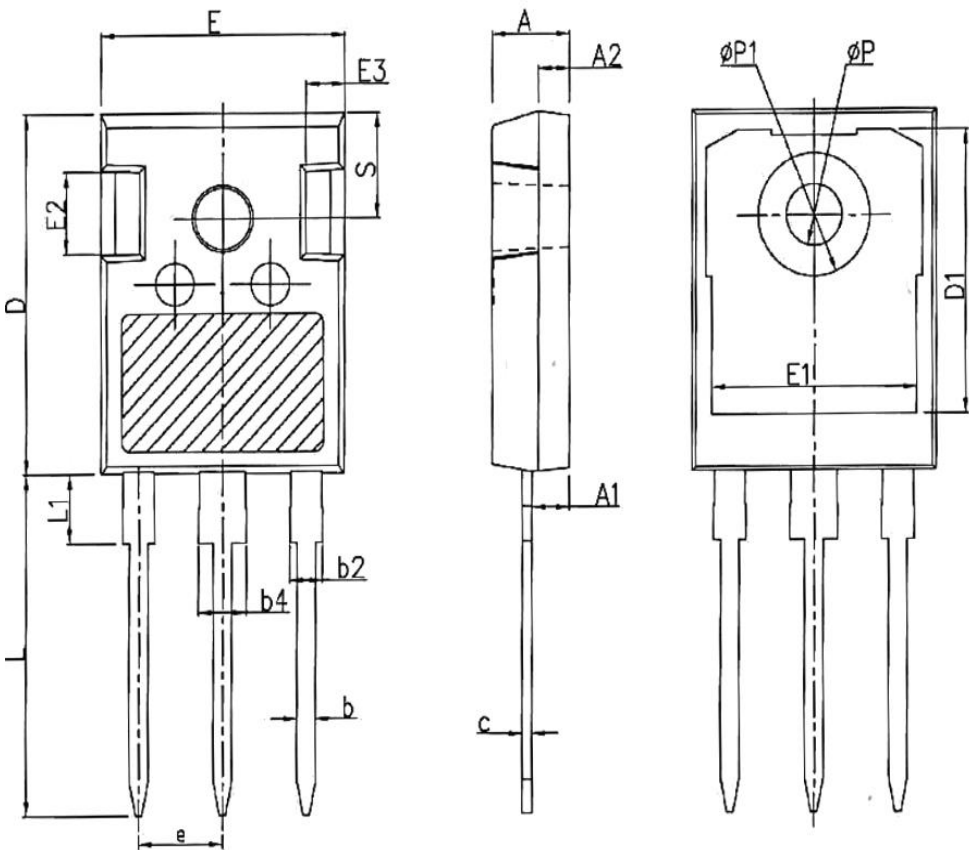

SYMBOL	mm		
	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.21	2.41	2.59
A2	1.85	2.00	2.15
b	1.11	1.21	1.36
b2	1.91	2.01	2.21
b4	2.91	3.01	3.21
c	0.51	0.61	0.75
D	20.70	21.00	21.30
D1	16.25	16.55	16.85
E	15.50	15.80	16.10
E1	13.00	13.30	13.60
E2	4.80	5.00	5.20
E3	2.30	2.50	2.70
e	5.44BSC		
L	19.62	19.92	20.22
L1	-	-	4.30
ΦP	3.40	3.60	3.80
ΦP1	-	-	7.30
S	6.15BSC		

Marking Information



B65A075WHH

XXXXXX

Note:

B65A075WHH = Product Name Code

XXXXXXX = Date code

Contact ALKAIDSEMI sales for detail information

Revision History

Revision	Release Date	Remark
Rev.1.1	2023/9/11	

Disclaimer

The information given in this document describes the independent performance of the product, but similar performance is not guaranteed under other working conditions, and cannot be guaranteed when installed with other products or equipment. To achieve the required performance of the product in actual scenarios, the customer should conduct a complete application test to assess the functionality of the product.

Alkaidsemi assumes no responsibility for equipment failures result from using products at values that exceed the ratings, operating conditions, or other parameters listed in the product specifications.

The product described in this specification is not applicable for aerospace or other applications which requires high reliability. Customers using or selling these products for use in medical, life-saving, or life-sustaining applications do so at their own risk and agree to fully indemnify.

Due to product or technical improvements, the information described or contained herein may be changed without prior notice.