

150V 7mohm N-channel SGT MOSFET
AKG15N070DM

Description:

This N channel SGT MOSFET has been designed to very low on-state resistance and superior EAS performance, especially for BMS and Motor driving applications.

Features:



- Ultra-low on-resistance
- Low FOM $R_{DS(ON)} \times Q_g$
- RoHS compliant (Note 1)
- Halogen-free (Note 1)

Applications:

- Battery Management System
- Solenoid and Motor Drivers

Key Performance Parameters:

Parameter	Value	Unit
V_{DS}	150	V
$R_{DS(ON)}, \text{ max } @V_{GS} = 10 \text{ V}$	7	mΩ
I_D	110	A



Ordering Information:

Ordering Code	Package Type	Marking Code	Form	Packing
AKG15N070DM	TO-263	G15N070DM	Tape Reel	1000PCS

Notes:

1. Contact ALKAIDSEMI sales for detail information

Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{DS}	Drain-Source Voltage	150	V
I_D	Drain Current - Continuous ($T_C = 25^\circ\text{C}$) ^(Note 1)	110	A
	Drain Current - Continuous ($T_C = 100^\circ\text{C}$)	70	A
I_{DM}	Drain Current - Pulsed ^(Note 2)	440	A
V_{GS}	Gate-Source Voltage	± 20	V
E_{AS}	Single Pulsed Avalanche Energy ^(Note 3)	625	mJ
P_D	Power Dissipation ($T_C = 25^\circ\text{C}$)	192	W
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to +150	$^\circ\text{C}$

Thermal Characteristics

Symbol	Parameter	Value	Units
$R_{\theta JC}$	Thermal Resistance, Junction-to-Case, Steady-State	0.65	$^\circ\text{C/W}$
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient, Steady State ^(Note 4)	50	$^\circ\text{C/W}$

Notes:

1. The max drain current rating is package limited
2. Repetitive Rating: Pulse width limited by maximum junction temperature
3. $L = 0.5 \text{ mH}$, $V_{DD} = 75 \text{ V}$, $I_{AS} = 50 \text{ A}$, $R_g = 25 \Omega$, Starting $T_J = 25^\circ\text{C}$
4. Mount on minimum PCB layout

Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Static Characteristics						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$	150			V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 150\text{ V}, V_{GS} = 0\text{ V},$			1	μA
I_{GSS}	Gate Leakage Current	$V_{GS} = \pm 20\text{ V}, V_{DS} = 0\text{ V}$			± 100	nA
$V_{GS(th)}$	Gate Threshold voltage	$V_{DS} = V_{GS}, I_D = 250\text{ }\mu\text{A}$	2	3	4	V
$R_{DS(on)}$	Drain-Source on-state resistance	$V_{GS} = 10\text{ V}, I_D = 20\text{ A}$		5.5	7	m Ω

Dynamic Characteristics

C_{iss}	Input Capacitance	$V_{DS} = 75\text{ V}, V_{GS} = 0\text{ V},$ $f = 1\text{ MHz}$		5929		pF
C_{oss}	Output Capacitance			546		pF
C_{rss}	Reverse Transfer Capacitance			23		pF
R_g	Gate Resistance	$f = 1\text{ MHz}$		2.2		Ω

Switching Characteristics

$t_{D(on)}$	Turn On Delay Time	$V_{DD} = 75\text{ V}, R_L = 3.75\text{ }\Omega,$ $V_{GS} = 10\text{ V}, R_G = 6\text{ }\Omega$		32		ns
t_r	Rise Time			49		ns
$t_{D(off)}$	Turn Off Delay Time			80		ns
t_f	Fall Time			46		ns
Q_g	Total Gate Charge	$V_{DD} = 75\text{ V}, I_D = 20\text{ A},$ $V_{GS} = 10\text{ V}$		84.3		nC
Q_{gs}	Gate-Source Charge			24.8		nC
Q_{gd}	Gate-Drain Charge			16.9		nC

Drain-Source Diode Characteristics and Maximum Ratings

I_S	Maximum Continuous Body-Diode Forward Current			110	A
I_{SM}	Maximum Pulsed Body-Diode Forward Current ^(NOTE 1)			440	A
V_{SD}	Diode Forward Voltage	$V_{GS} = 0\text{ V}, I_S = 1\text{ A}$		0.6	V
t_{rr}	Reverse recovery time	$V_{DD} = 75\text{ V}, I_D = 15\text{ A},$ $di/dt = 100\text{ A}/\mu\text{s}$		92	ns
Q_{rr}	Reverse recovery charge			364	nC
I_{rrm}	Peak Reverse Recovery Current			6.6	A

Electrical Characteristics Diagrams

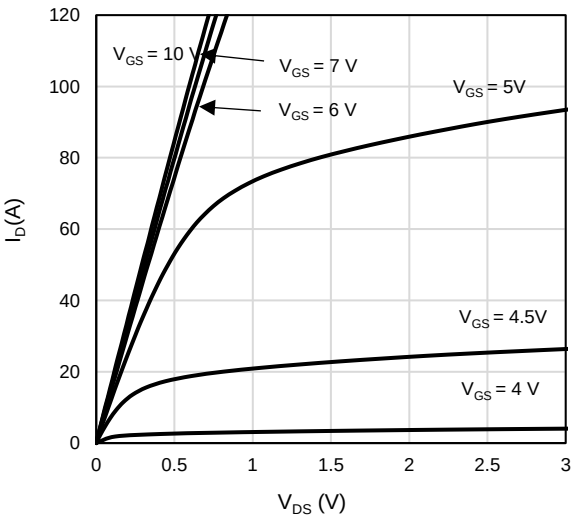


Figure 1: On-Region Characteristics

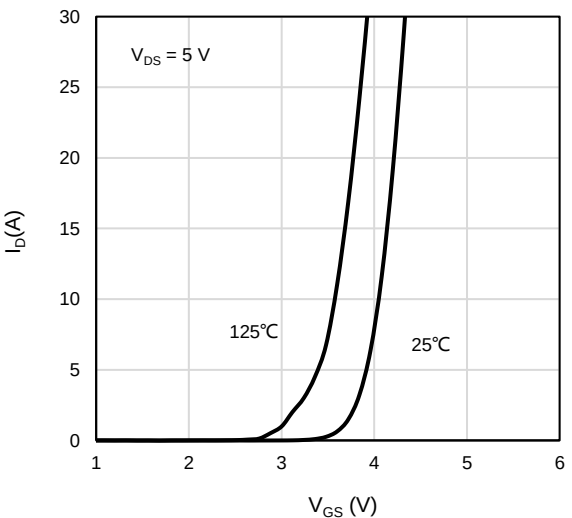


Figure 2: Transfer Characteristics

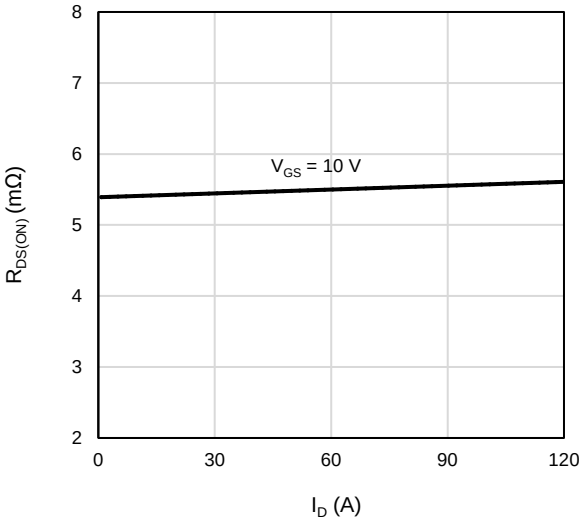


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

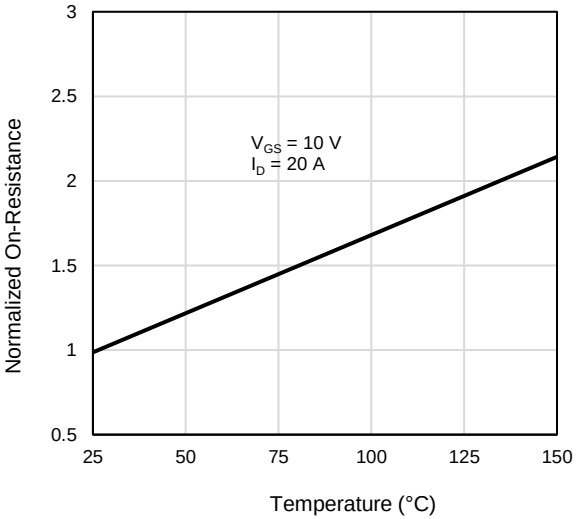


Figure 4: On-Resistance vs. Junction Temperature

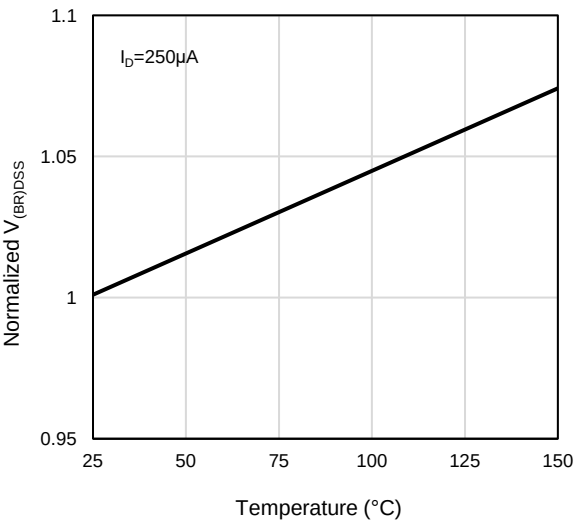


Figure 5: Breakdown Voltage vs. Junction Temperature

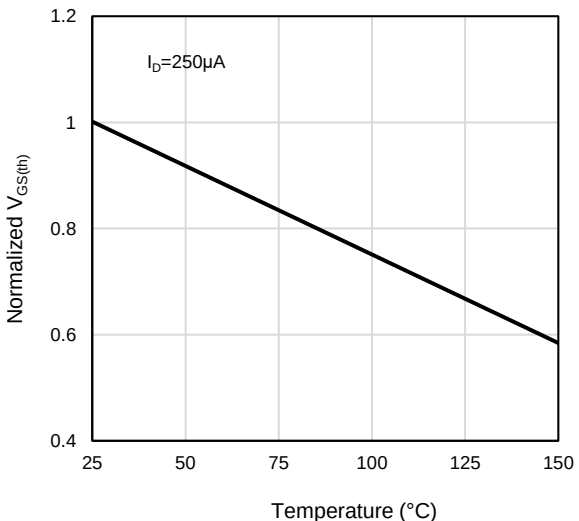


Figure 6: Threshold Voltage vs. Junction Temperature

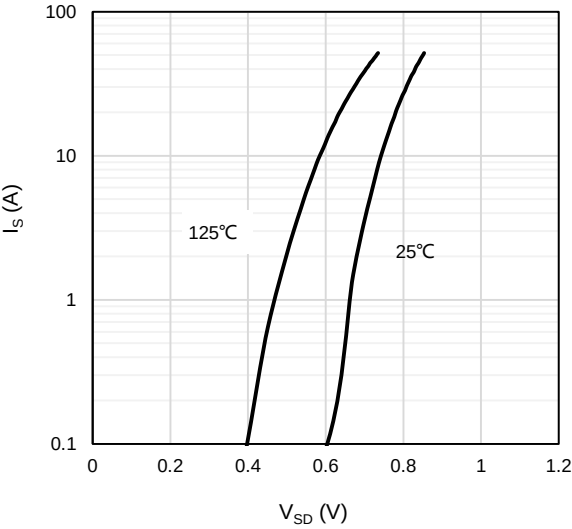


Figure 7: Body-Diode Characteristics

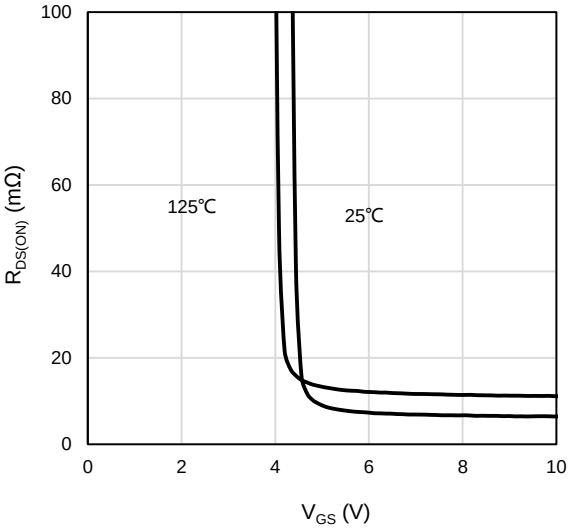


Figure 8: On-Resistance vs. Gate-Source Voltage

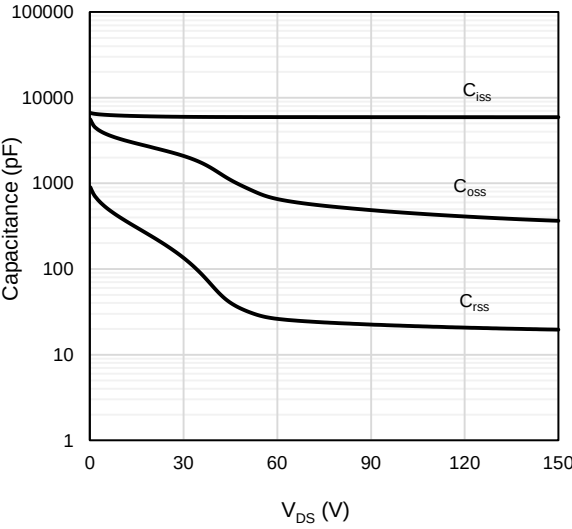


Figure 9: Capacitance Characteristics

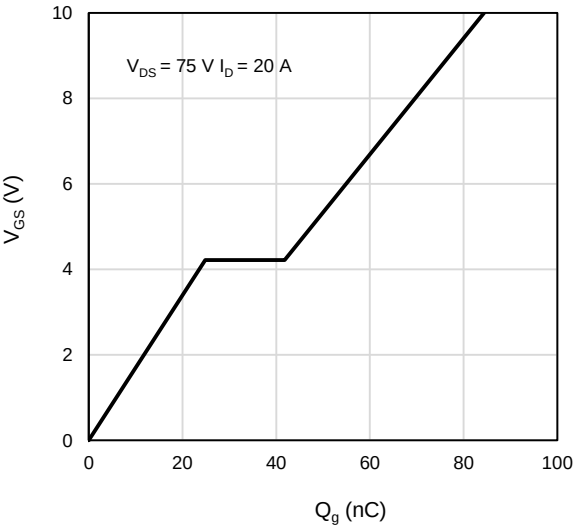


Figure 10: Gate-Charge Characteristics

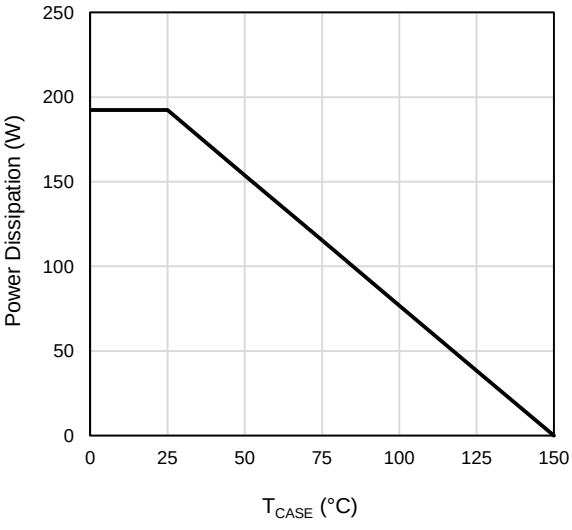


Figure 11: Power De-rating

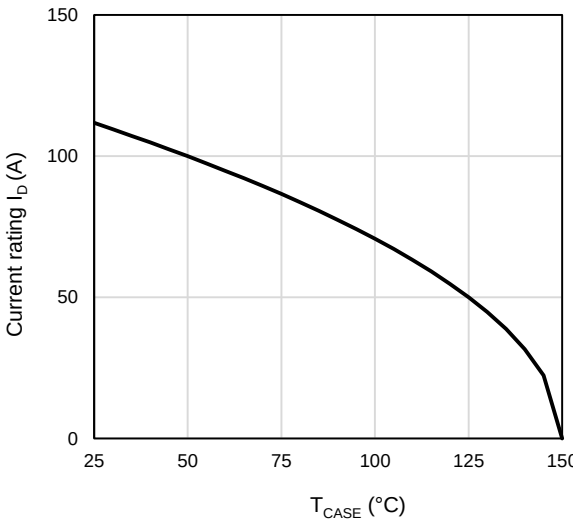


Figure 12: Current De-rating

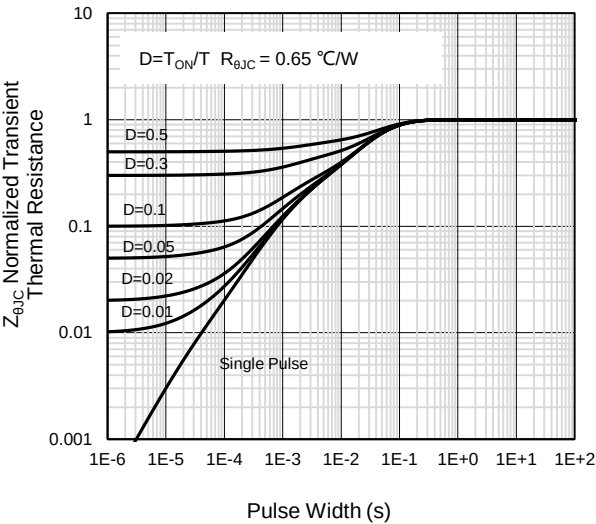


Figure 13: Normalized Maximum Transient Thermal Impedance


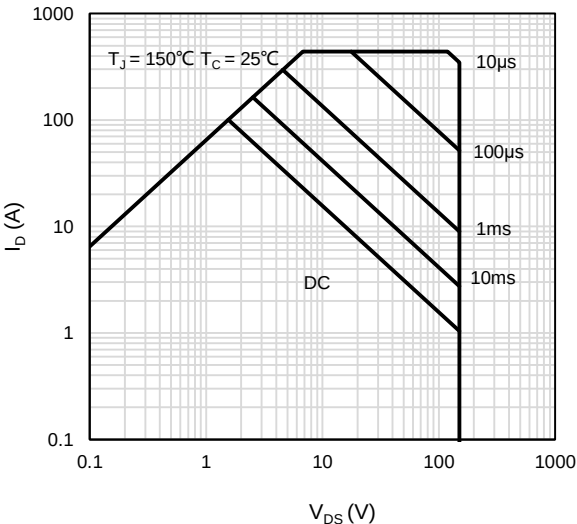



Figure 14: Maximum Forward Biased Safe Operating Area

Test Circuit and Waveform


Gate Charge Test Circuit & Waveform

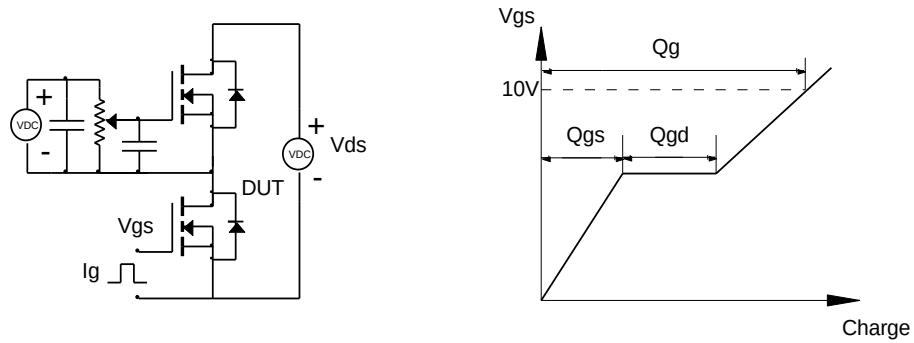


Resistive Switching Test Circuit & Waveforms

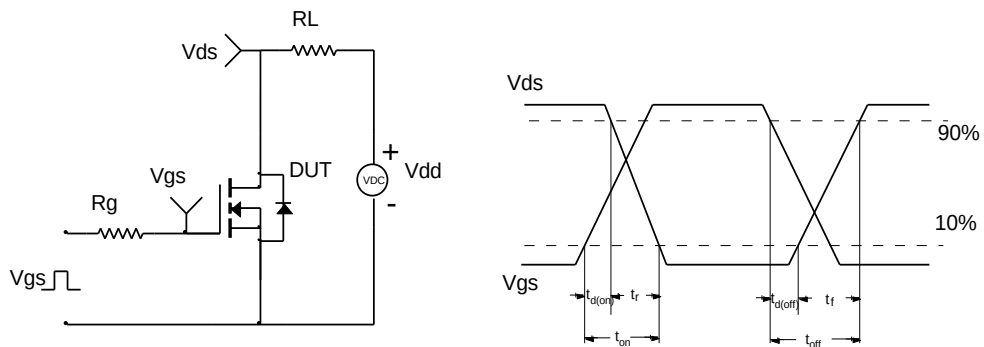

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

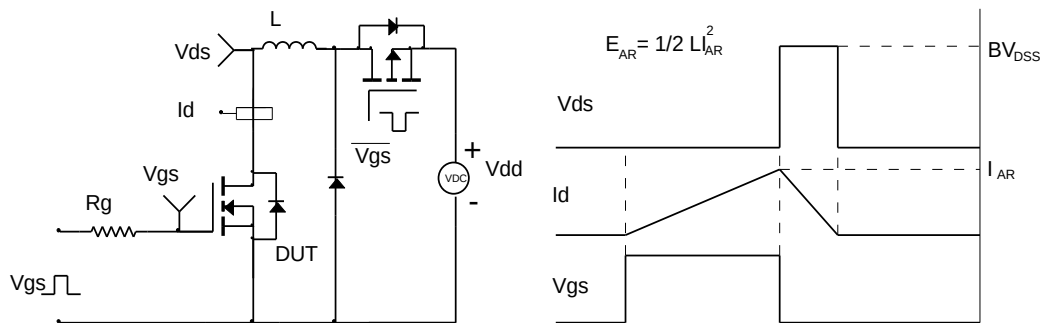


Diode Recovery Test Circuit & Waveforms

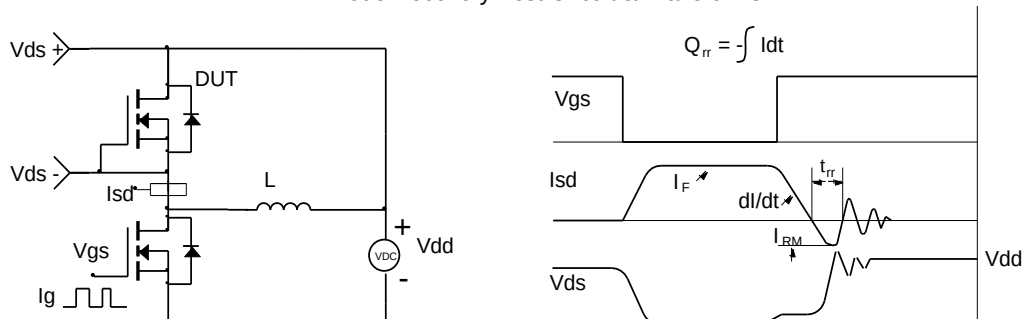

Package Outlines



POD1

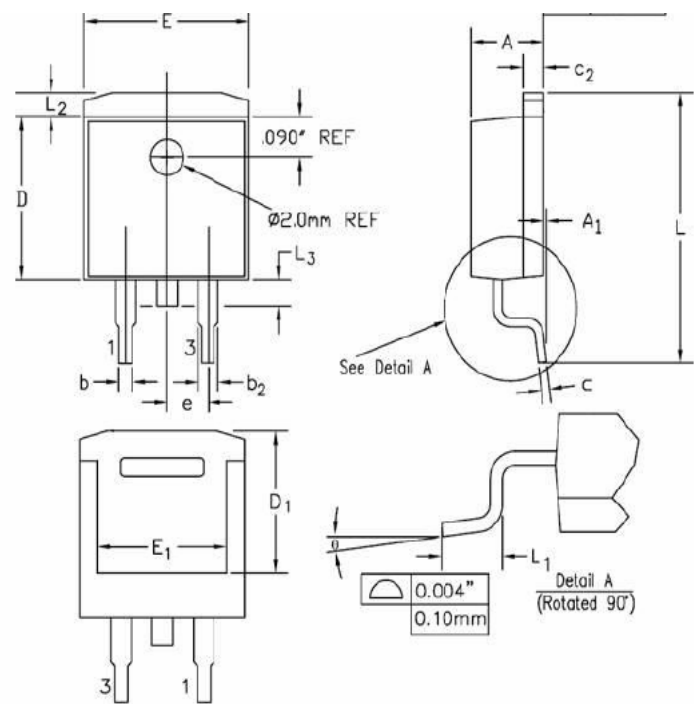



SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN	MAX	MIN	MAX	
A	0.170	0.180	4.32	4.57	
A1	-	0.010	-	0.25	
b	0.028	0.037	0.71	0.94	
b2	0.045	0.055	1.15	1.40	
c	0.018	0.024	0.46	0.61	
c2	0.048	0.055	1.22	1.40	
D	0.350	0.370	8.89	9.40	
D1	0.315	0.324	8.01	8.23	
E	0.395	0.405	10.04	10.28	
E1	0.310	0.318	7.88	8.08	
e	0.100 BSC.		2.54 BSC.		
L	0.580	0.620	14.73	15.75	
L1	0.090	0.110	2.29	2.79	
L2	0.045	0.055	1.15	1.39	
L3	0.050	0.070	1.27	1.77	
θ	0°	8°	0°	8°	

Package Outlines

POD2

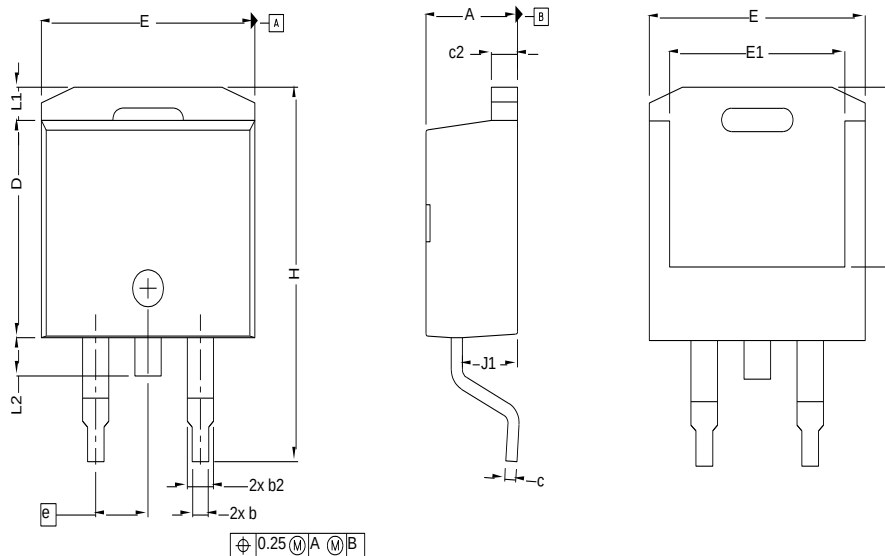

OPTION 1
2 LEADs



NOTE

1.0 DIMENSIONING & TOLERANCEING CONFIRM TO ASME Y14.5M-1994.

2.0 ALL DIMENSIONS ARE IN MILLIMETERS. ANGLES ARE IN DEGREES.

3.0 HEAT SINK SIDE FLASH IS MAX. 0.8mm.

4.0 RADIUS ON TERMINAL IS OPTIONAL.

SYMBOL	MIN.	MAX.	SYMBOL	MIN.	MAX.
A	4.36	4.56	E	10.15	10.55
A1	0	0.25	E1	8.10	8.70
b	0.70	0.90	e	2.54	BSC
b1	0.51	0.89	H	15.00	15.60
b2	1.17	1.37	L	1.90	2.50
b3	1.17	1.37	L1	-	1.65
c	0.38	0.69	L2	-	1.78
c1	0.38	0.53	L3	0.25	TYP
c2	1.19	1.34	L4	4.78	5.28
D	8.60	9.00	J1	2.56	2.96
D1	6.90	7.50			




Marking Information



Note:
G15N070DM = Product Name Code
XXXXXXX = Date code
Contact ALKAIDSEMI sales for detail information

Tape & Reel Information

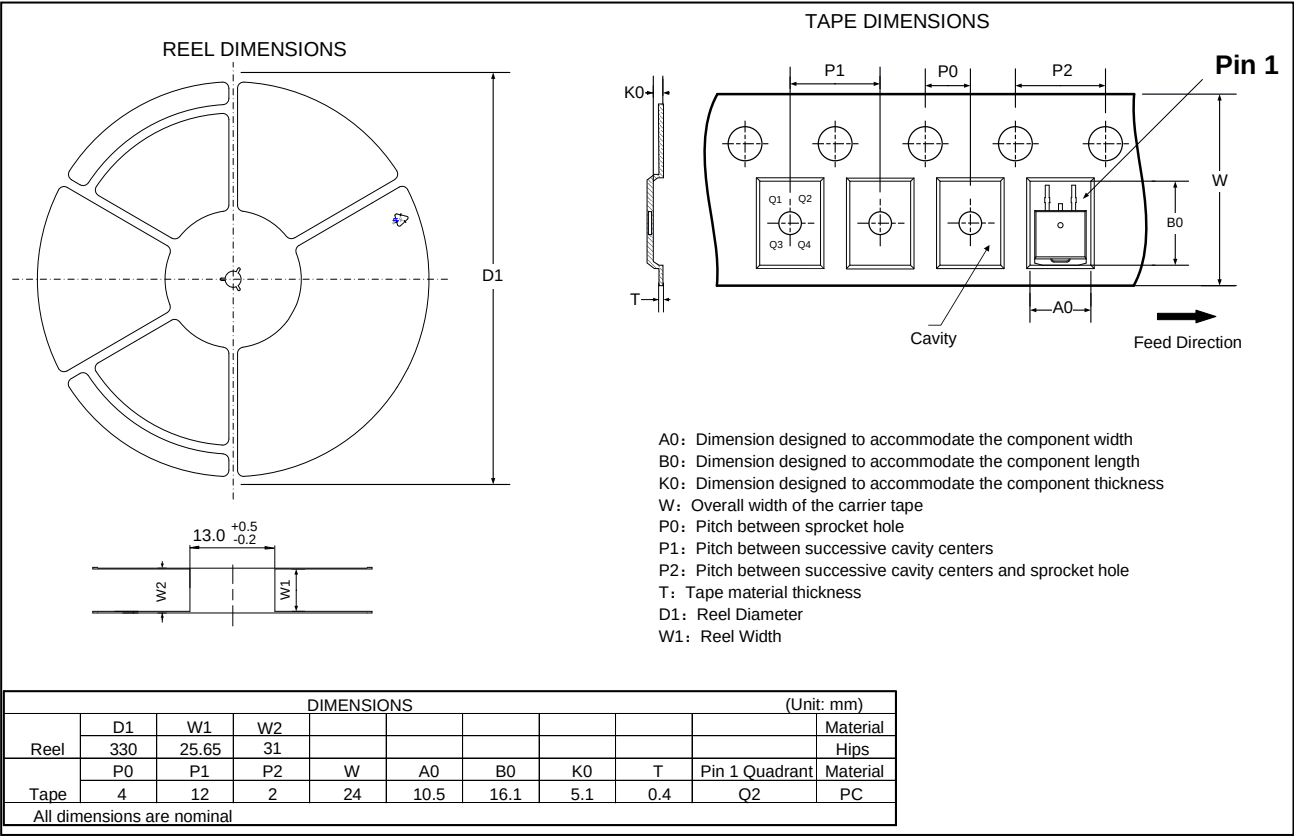



Revision History

Revision	Released	Remark
Rev.1.1	2023	

Disclaimer

The information given in this document describes the independent performance of the product, but similar performance is not guaranteed under other working conditions, and cannot be guaranteed when installed with other products or equipment. To achieve the required performance of the product in actual scenarios, the customer should conduct a complete application test to assess the functionality of the product.

Alkaidsemi assumes no responsibility for equipment failures result from using products at values that exceed the ratings, operating conditions, or other parameters listed in the product specifications.

The product described in this specification is not applicable for aerospace or other applications which requires high reliability. Customers using or selling these products for use in medical, life-saving, or life-sustaining applications do so at their own risk and agree to fully indemnify.

Due to product or technical improvements, the information described or contained herein may be changed without prior notice.